

541,579

(12) 按照专利合作条约所公布的国际申请

(19) 世界知识产权组织
国际局



(43) 国际公布日:
2004年8月12日(12.08.2004)

PCT

(10) 国际公布号:
WO 2004/067871 A1

(51) 国际分类号⁷: E04B 1/90, B32B 13/12
(21) 国际申请号: PCT/CN2004/000044
(22) 国际申请日: 2004年1月14日(14.01.2004)
(25) 申请语言: 中文
(26) 公布语言: 中文
(30) 优先权:
03113703.2 2003年1月28日(28.01.2003) CN
(71)(72) 发明人/申请人: 郑志伟(ZHENG, Zhiwei) [CN/
CN]; 中国香港碧瑤湾42座4209室, Hong Kong
(CN).
(74) 代理人: 中科专利商标代理有限责任公司(CHINA
SCIENCE PATENT & TRADEMARK AGENT
LTD); 中国北京市海淀区王庄路1号清华同方科技大
厦B座15层, Beijing 100083 (CN).

BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW

(84) 指定国(除另有指明, 要求每一种可提供的地区保护):
ARIPO(BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ,
TZ, UG, ZM, ZW), 欧亚专利(AM, AZ, BY, KG, KZ,
MD, RU, TJ, TM), 欧洲专利(AT, BE, BG, CH, CY,
CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT,
LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI(BF, BJ,
CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE,
SN, TD, TG)


本国际公布:
— 包括国际检索报告。

(81) 指定国(除另有指明, 要求每一种可提供的国家保护):
AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW,

所引用双字母代码和其它缩写符号, 请参考刊登在每期
PCT公报期刊起始的“代码及缩写符号简要说明”。


(54) Title: A COMPOSITE SANDWICH WALL PANEL

(54) 发明名称: 复合夹心墙板

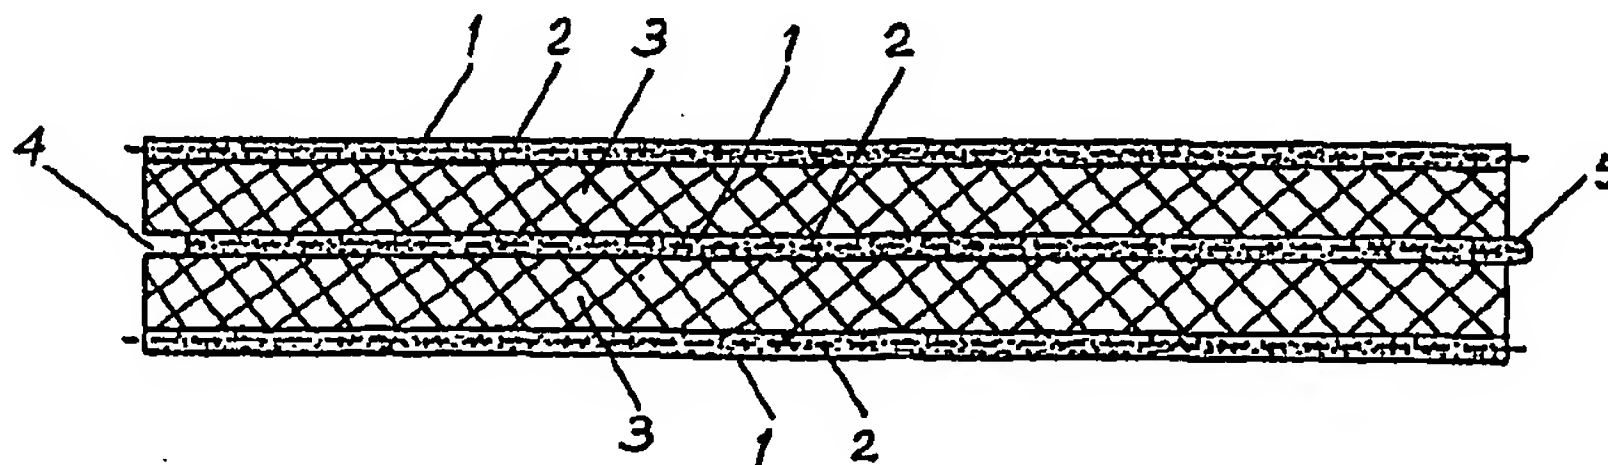

*Name on the declaration
does not correspond with the name
on the published IA.*

(57) Abstract: The present invention relates to a composite sandwich wall panel comprising: at least two fine sand gypsum or concrete panels (1) in each of which a glass fiber web (2) is disposed at center, and at least one polystyrene panel (3), which are bonded alternatively. The surface layer and the bottom layer are the fine sand gypsum or concrete panels, and according to the requirement, the wall panel can be produced to have three or more layers of composite panels. The wall panel of the present invention has advantages of light weight, easy installation, strong loading capacity, no seam crack, no plaster, and good performance of thermal insulation, sound insulation and fireproof as well as it is suitable for internal wall and external wall.



WO 2004/067871 A1